DATE	REV	DESCRIPTION	BY	CHKD

Marking:<LP448> ACT UTP CATEGORY 5 E PATCHCABLE 4X2XAWG#24 ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B.2
3P VERIFIED FOR GIGABIT ETHERNET TYPE CM (UL) C(UL) CMH E164469-F3 LEADFREE EN71 15000.001-XXXXXX XXXM

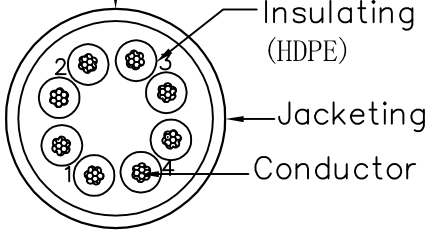

orange 1 white/orange	green 2 white/green
blue 3 white/blue	brown 4 white/brown



305M/R

Conductor		Bare Copper 24AWG 7/0.196±0.015mm
Insulation		Thickness:MIN at any point:0.15mm MAX AVG:0.25mm Diameter:0.98±0.06mm
Jacketing	PVC	Thickness:MIN at any point:0.42mm MAX AVG:0.48mm Diameter:5.4±0.2mm

Wire	CAT.5E UTP STR 24AWG*4P
Length	305m
color	BLACK RAL9011

RoHS Compliant

UL Certification & UL file number: E164469

Unless specified on the drawing, tolerances are per the follows:
. ± 1
.X ± 0.2
.XX ± 0.05

3RD

DRAW.NO		ITEM	EP359B		
DEPARTMENT		DRAW	WZY	DATE	2008/1/14
SCALE		CHECKER		APPROVAL	
UNIT	MM	SHEET	1 OF 1		